

PRODUCT DATA SHEET



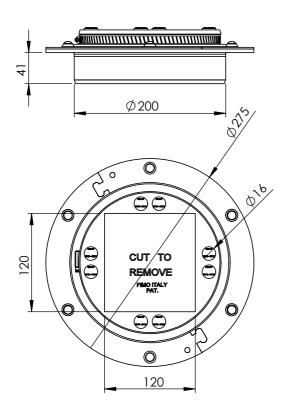

| CERTIFICATION | | | |
|-----------------|------------------------------|--|--|
| IEC 60529 IP67 | Waterproof | | |
| EN 1366-3:2009 | Fire Resistant | | |
| | | | |
| MATERIAL | | | |
| | | | |
| Gasket | Black EPDM U.V. Resistant | | |
| Flance | AISI 304 | | |
| Flange | Stainless Steel | | |
| Hasa Clawn | AISI 304 | | |
| Hose Clamp | Stainless Steel | | |
| Internal Collar | AISI 304 | | |
| internal Collar | Stainless Steel | | |

| code | 6115130200 | | |
|---------|--|--|--|
| article | PTR 200/120 SQ=pass. par. stag. 1p.d.200 | | |

| 1 | 1.9994Kg. |
|---|-----------|

| RI | DATE | DR | DAT | Έ | AP |
|----|----------------|-----------------|----------------|---|------|
| 02 | | | | | |
| 01 | | | | | |
| 00 | 21/10/14 1° | G.S. EMISSIC | 21/10/14 DN | | A.V. |
| | | | | | IS |





Description:

The central square 120x120 opening is temporarly sealed with a removable rubber sheet. The opening is conceived to house **GPR** rectangular cushions with different diameter round holes. Additional eight diam. 16 mm holes for smaller cables, combined with **GRR-16**reductions, have been foreseen. The final sealing is ensured by tightening the hose clamp.